

Data Sheet

Power USB-C Built-in Socket PD/QC max. 50W

Art. No. 67351990 (BP)

Art. No. 67351995 (SP)

02.08.2024

Input voltage: 8 - 34 V DC

Output voltage: 5 -20 V DC

Input voltage	Output voltage	Output current max.
12,0V	5,0V	3,0A
	9,0V	3,0A
	12,0V	3,0A
24,0V	5,0V	3,0A
	9,0V	3,0A
	12,0V	3,0A
	15,0V	3,0A
	20,0V	2,5A

Charging protocol: Power Delivery; Quick Charge, PPS

Current consumption: approx. 1 mA (idle)

Protection against: Short circuit, overload, overvoltage
and overtemperature

Connections: Cable ends 6 mm tin-plated

Panel thickness: from 2 mm to 16 mm

Mounting hole: 28 mm (27,8mm)

Power USB-C Built-in Socket PD/QC max. 50W

Art. No. 67351990 (BP)

Art. No. 67351995 (SP)

02.08.2024

Material:



Housing: Makrolon

Temperature stress: max. 130 °C

Cable:

Stranded cable: 2 x 0,5 mm² red/black

Length: 150 mm

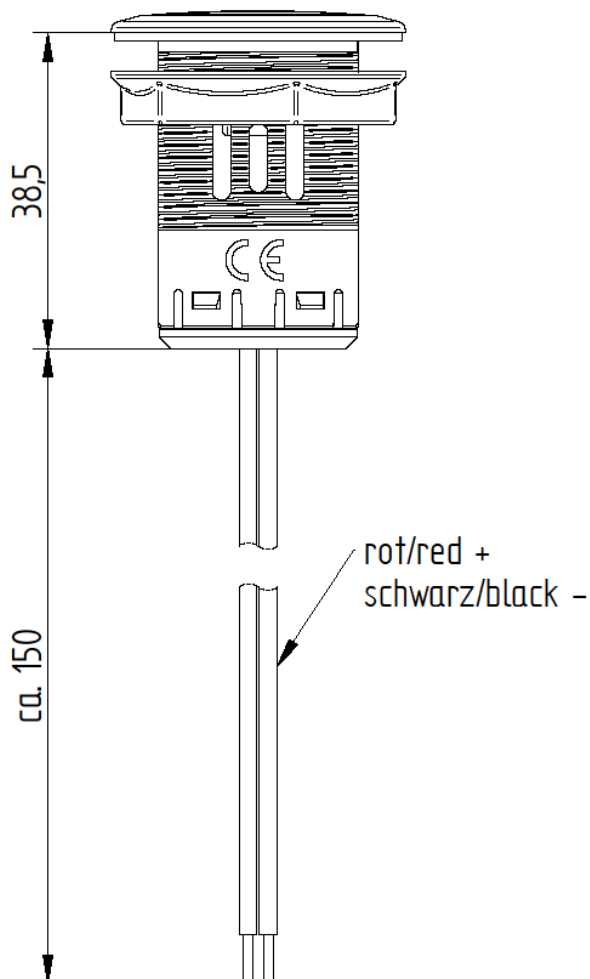

Installation Order:

